
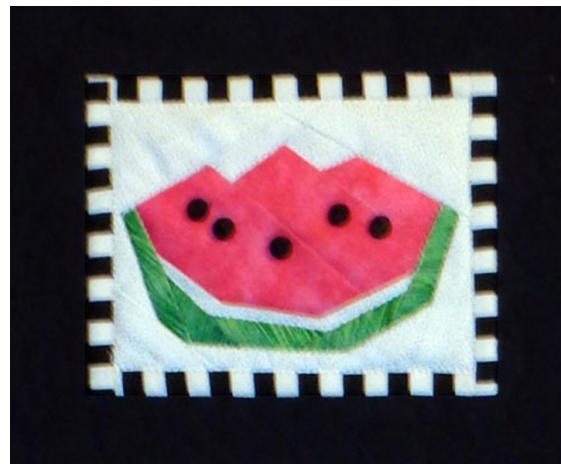


Welcome. Thanks for stopping by. Here are two small blocks for you to use. Please print out the foundation, then trace it onto freezer paper. Do not cut up your Master.

Single Foundation: (does not break into sections)


Select one Pink, one White and one Green, plus a few small black buttons.

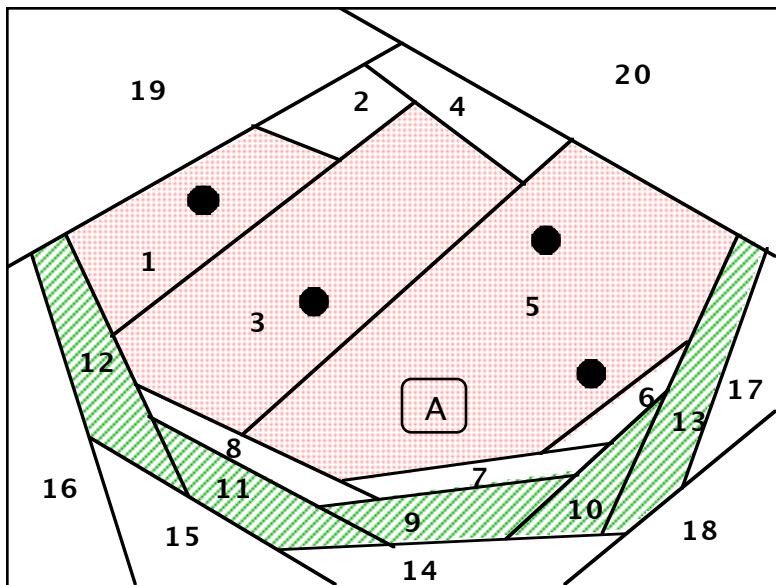

Master Foundation for a 3" x 4" finished block.
Foundation is a 'mirror image' of the finished block.

Multiple Sections:

Select one White, one Tan, and one Blue for the block. Add an accent inner border, then outer borders.

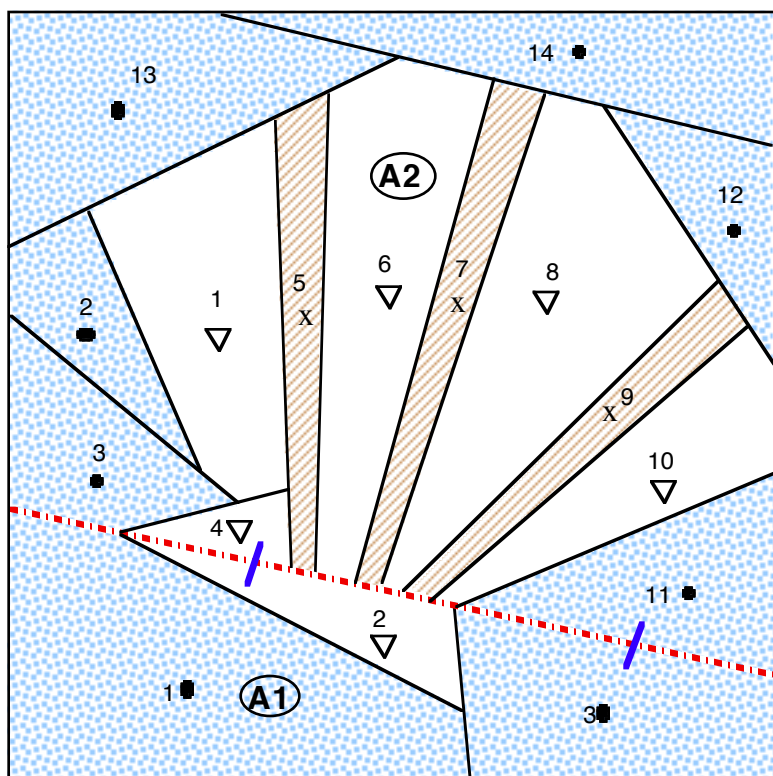

Fabric Code:

▽ White

● Blue

x Tan


Master Foundation for a 4" finished block.
Foundation is a 'mirror image' of the finished block.

Sewing Steps:


Set machine for 16 - 18 stitches per inch. Have a small iron and surface nearby as you will use it after every piece is added.




Step 1: Add 'reference marks' on broken line. Trim all excess paper and cut sections apart on the broken red line. Use an x-acto or craft knife.

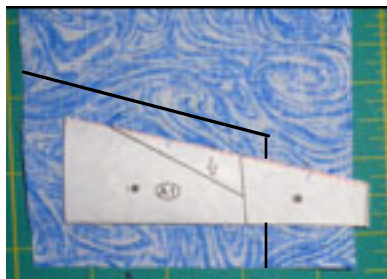

Step 2: Work with Section A1. Bring your foundation **to the fabric** and position it so that all of piece #1 is covered. Iron freezer paper to the **wrong side of the fabric**. Trim away excess.

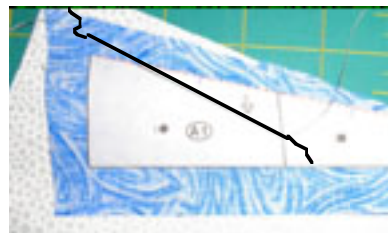


Step 3: Place fabrics **right sides together** for 2nd piece parallel to the sewing line. Sew, going off the paper when necessary.

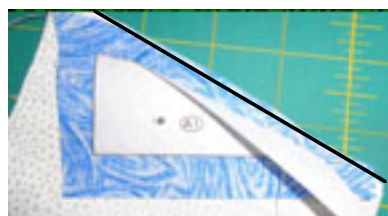

Step 4: Fold foundation back to the sewn line and trim seam allowance to 1/4". "Flip" the new fabric into place and iron so it sticks. Trim generously beyond the shape.





Step 5: Move on to piece #3. Align fabric right sides together parallel to the sewing line. Stitch in place.

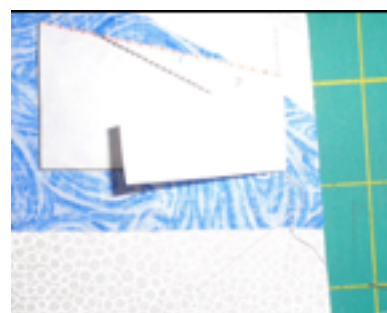

Step 6: Fold the foundation back and trim seam allowance to 1/4".



Step 7: Again, 'flip' the new fabric into place and iron it to the foundation. Cut away excess fabric.

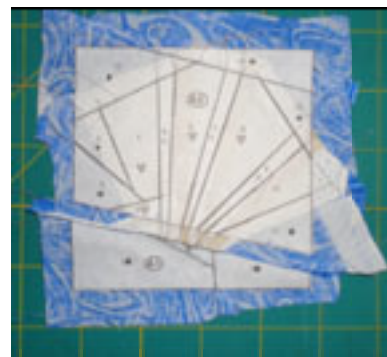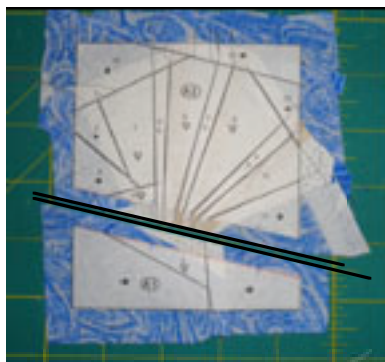

Section A1 is now complete. Don't trim anything else. Move on to A2. It has numerous pieces but it is done in just the same manner. Start by ironing piece #1 in place. Align piece #2, stitch in place, trim, flip, iron in place, and trim away excess. When both sections are done **trim only the adjoining edges exactly 1/4" beyond the paper**. Place sections right sides together aligning edges exactly and pin through the blue 'reference marks' to align. (Open up while pinned to check that all edges are aligned. Stitch, press seam allowance to side of least resistance.